SOLUS Fire Features

LINEAR DOUBLE HIGH ELECTRONIC START

Fire is beautiful and also dangerous if not handled properly. Please have a qualified gas fitter setup and install this product according to local codes.

NG & LP

This product is safe, as long as these minimum clearances to adjacent materials are maintained.

FOR OUTDOOR USE ONLY

NORTH AMERICA SPECIFICATIONS

 Gas type:
 Natural Gas
 Propane

 Gas press:
 3.5" - 7.0" w.c.
 N/A

 Electrical:
 24V / 110 VAC
 24V / 110 VAC

 1.5A, 60 hz
 1.5A, 60 hz

 BTU:
 108,000
 108,000

MUST BE ANCHORED TO GROUND

UK & EUROPEAN SPECIFICATIONS

Gas type: Gas press: Electrical:	<u>Natural Gas</u> G20-20 mbar 240~V, 0.13A 50/60 hz, 0.027kW	Propane/But. G31-37 mbar 240~V, 0.13A 50/60 hz 0.027kW
Heat Out:	G20 / 31.6	G31 / 31.6


MUST BE ANCHORED TO GROUND


 Strength:
 10,000 psi (proprietary)

 Weight:
 600 lbs / 272 kg

 (4 slabs @ 150 lbs / 68 kg)

JOB / ORDER Name or Number:



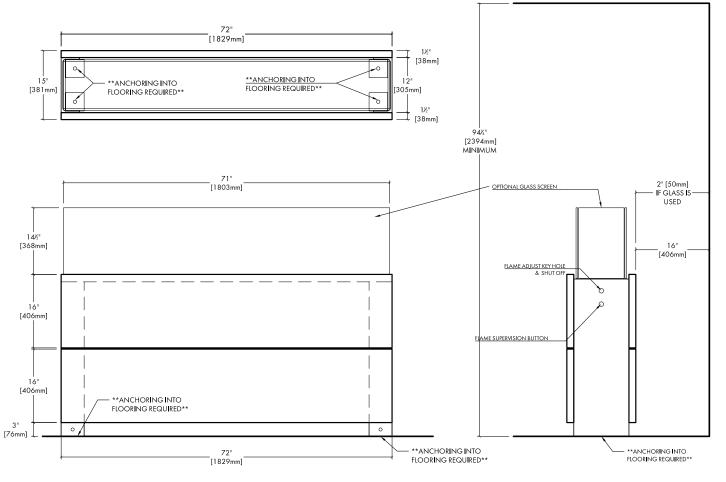

CLEARANCES to ADJACENT MATERIALS